

Vendor Bid Process Form

Vendor Name: All Service Cont. Date: 5/25/10

Board Approval: _____

State/County Contract: _____

Procurements with a value of \$500.00 to less than \$5000.00= 3 verbal quotes

- 1 _____
- 2 _____
- 3 _____

Item(s) that are under \$500.00 Threshold _____

Procurements with a value of \$5000.00 to less than \$25000.00= 3 written quotes

Quotes Attached

- 1 All Service Contracting = \$35,467.00
- 2 Roberts Water Tech. = \$59,700.00
- 3 Tech Coord = \$55,000.00

Single Source vendor: _____


Emergency Purchase: _____

Nature of Emergency: _____

Other: _____

Dept. Signature: _____

Purchasing Approval CR Hanson

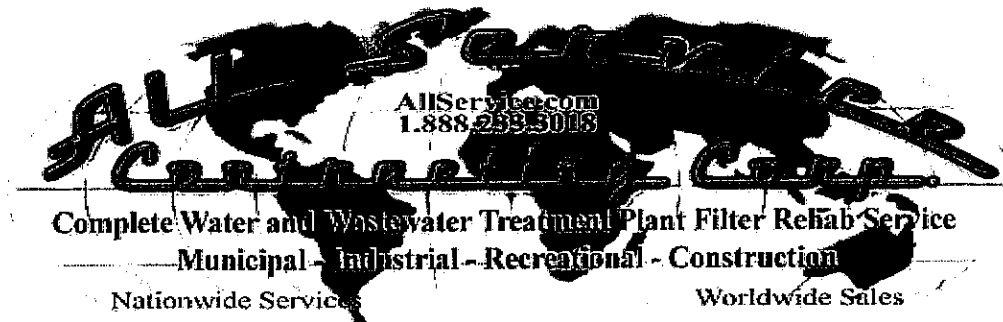

A Womens Business Enterprise (WBE)
Listed with Central Contractor Registration (CCR)

ALL Service... our name says it all

To: C.R. Pearson Purchasing Coordinator
At: Englewood Water District

Re: Wheeler Under-drains
Spheres, & Media

All Service Contracting Corp. (A.S.C.C.) is pleased to offer the following.

SCOPE: Supporting Material & Media

- (91) cu.ft. 1" x 5/8"
- (91) cu.ft. 5/8" x 3/8"
- (91) cu.ft. 3/8" x 3/16"
- (91) cu.ft 3/16" x #10
- (273) cu.ft .45-.55mm 1.50 uc
- (455) cu.ft .85-.95mm 1.50 uc.

All of the above mentioned material will be packaged in super-sacks with lifting straps.

SCOPE: Porcelain Spheres

- (850) 3" spheres 50 per case
- (1,800) 1 3/8" spheres 600 per case

SCOPE: Wheeler Under-drain panels.

- (91) Wheeler 5 ball under-drain panels (approximately 24" x 24")

Lump Sum Cost: \$35,467.00 (delivered to job site)

Should in the event a service tech is required for the media installation figure \$800.00 per day onsite, plus (2) days travel and \$175.00 for motel and perdium.

Payment terms 25% with purchase order 75% due 30 days after delivery. All past due accounts will be charged 2 ½% per month on the unpaid balance. Should in the event Englewood Water District default in payment, Englewood Water District shall be responsible for any attorney fees or other cost associated with collection. The laws of the State of Illinois shall prevail. All claims shall be heard in the City of Decatur in Macon County Illinois.

The above quoted price is good for 14 days due to changes in the freight rates.

Should you have any questions concerning this quote please call our office at 217-233-3018.

ALL SERVICE CONTRACTING CORP.

By: _____ Date: 6-10-10
Brian K. Burcham VP.
Associate Member A.W.W.A.

cc: Becky J. Burcham President & Owner

C.R. Pearson

From: Paul Jacobs [paul@tscjacobs.com]
Sent: Wednesday, July 14, 2010 11:40 AM
To: C.R. Pearson
Cc: Warren Ringler
Subject: Roberts Filter
Attachments: Englewood, FL_07-14-10.pdf

CR,
THE PRICE FOR THIS PROPOSAL FROM ROBERTS FILTER IS \$59,700. PLEASE LET ME KNOW IF YOU
NEED ANYTHING ELSE.

BEST REGARDS,

PAUL S. JACOBS

 **TSC-JACOBS**

11021 COUNTRYWAY BLVD.
TAMPA, FL 33626
813/888-5556 PHONE
813/854-2183 FAX
paul@tscjacobs.com



Roberts Water Technologies, Inc. *A Unit of the Roberts Filter Group*

PROVIDING SPECIALIZED PRODUCTS TO THE WATER AND WASTEWATER TREATMENT INDUSTRIES

Sixth and Columbia Avenue

P.O. Box 167

Darby, PA 19023

www.robertsfiltergroup.com

610-583-3131

fax 610-583-0117

July 14, 2010

Englewood Water District
201 Selma Avenue
Englewood, FL 34223

Attention: Mr. C.R. Pierson

Reference: Englewood, Florida
Roberts' Original Contract 3614-S

Subject: Roberts' Proposal EI-10-1343-T Rev. 1.

Gentlemen:

Roberts Water Technologies, Inc. ("Roberts") is pleased to offer the below scope of work for the referenced project. Work includes materials for rehabilitating two (2) existing Precast Wheeler bottom filters, each filter measuring 13'-0" x 14'-0".

Scope of Work

1. Roberts shall furnish new precast Wheeler underdrain blocks. Each precast section shall have nominal dimensions of 24" square and 4" thick with nine pyramidal depressions. Make-up blocks shall have nominal dimensions of 7-1/2" x 24" with three pyramidal depressions.
2. New porcelain spheres shall be furnished .
3. Roberts shall furnish filter support gravel of the following configuration:

<u>Size</u>	<u>Finished Depth</u>	<u>Media Type</u>
1-1/2" x 3/4"	Pot Fill	Silica Gravel
1" x 5/8"	3"	Silica Gravel
5/8" x 3/8"	3"	Silica Gravel

The ROBERTS FILTER GROUP of Companies

Roberts Water Technologies • Roberts Environmental • Roberts Services • Roberts Leotech • Roberts Filter International • Roberts of Puerto Rico

3/8" x 3/16"	3"	Silica Gravel
3/16" x #10	3"	Silica Gravel

4. New filter media of the following configuration shall be furnished:

<u>Effective Size</u>	<u>Uniformity Coefficient</u>	<u>Media Type</u>	<u>Finished Depth</u>
0.45-0.55 mm	1.6 Max	Silica Sand	9"
0.95-1.05 mm	1.5 Max	Anthracite	30"

Notes:

- a. Filter media shall conform to the latest edition of AWWA B-100 Standard and shall be NSF 61 Listed.
- b. An extra 1" of fine silica sand and anthracite shall be furnished for backwashing and skimming of fines.

Supervisory Service:

The services of a Roberts Representative are not included in this scope of supply. These services may be obtained at the per diem rate (plus living and travel expenses) in effect at the time services are rendered. The current per diem straight time rate is \$980.00 plus living and travel expenses. Field services are provided in accordance with the terms and conditions on attached form M-100422A.

Price:

To be advised by Roberts' representative copied below.

Price quoted is:

1. F.O.B. shipping points via motor freight with freight prepaid and allowed to the jobsite or nearest regular motor freight stop if jobsite delivery is not possible.
2. Exclusive of any State, Local Sales or Manufacturer's Use Taxes.
3. For acceptance within thirty (30) days.
4. Based upon return of approved submittal data within two (2) weeks of submittal.
5. Firm for delivery within 30 weeks. Should purchaser delay shipment beyond 30 weeks, price may be subject to escalation charges of 1-1/2% per month.
6. Based upon acceptance of Roberts' Standard Terms & Conditions Of Sale in their entirety.

Drawings:

Submittals shall be provided within two (2) to four (4) weeks after Roberts' acknowledgment of the order.

Shipment:

Equipment shall ship within twelve (12) to fourteen (14) weeks after receipt of approved drawings or written notice to proceed with manufacturing.

Terms:


Please refer to the attached forms M6A-210 and M-100422A.

Work & Materials Not Included:

Roberts does not include any pipe, fittings, thimbles, valves, supports therefore, spare parts, misc. iron work, pumps, field wiring, instrumentation, field assembly nor installation, priming, painting, labor, start-up service, supervision, nor any other materials or services which are not covered within the above specified scope of this proposal.

We thank you for the opportunity of submitting our proposal to you for your review. Should you have any questions, please feel free to contact the undersigned or our sales representative whose name appears below.

Sincerely yours,
ROBERTS WATER TECHNOLOGIES, INC.



Warren E. Ringler
Regional Sales Manager

WER:idm

CC: Mr. Paul Jacobs
TSC-Jacobs Corporate Office
(813) 888-5556

C.R. Pearson

From: Ken Brown [kenbrown@techcoat.net]
Sent: Thursday, June 10, 2010 8:02 AM
To: C.R. Pearson
Subject: underdrains

Mr. Pearson,

I cannot get a manufacture to give me an actual quote with the limited info I have. Based on our past experience, I would a figure budget each underdrain in the \$55,000 to \$65,000 range.

You may want to contact the local rep for Leopold or Roberts since drawings must be made prior to actual price quote.

Hope this gives you the info you need.

Thanks,

Ken